

ST-101 WOODGRAIN FLUSH

INSULATED STEEL

Lynx

Napoleon/Lynx[®]



LYNX-NSW.COM/GARAGEDOORS

37

THE DOORS OF INDUSTRY.

UNI-COM ST-101, white, w/ full-view windows

38

RIBBED STEEL ST-101 door sections are two sided steel, manufactured in length compatible with most commercial opening dimensions. They are engineered for unique structural strength with wood end stiles and a horizontal "V" groove finish. - .016" GA. STEEL WOOD END STYLES - POLYSTYREN

R-VALUE RATING

WOODGRAIN

BROWN

BLACK

GA. STEEL

Woodgrain Flush

WHITE

OPTIONS

COLOR

Woodgrain Flush door sections are two sided steel, manufactured in lengths

compatible with most commercial opening dimensions. They are engineered for

unique structural strength with wood end stiles and a flush woodgrain finish.

Colors may not be exactly as shown.

OPTIONAL WINDOWS ARE COLOR MATCHED FOR EACH DOOR



"v" GROOVE BAKED ON POLYESTER **BAKED ON PRIMER** CHROMIC RINSE PHOSPHATE

STEEL SUBSTRATE

APPLICATION GUIDE ♦ Applicable ♦ Best

	FLUSH	ST-101
Agricultural/Pole Barns	♦	♦
Commercial/Industrial	\Diamond	♦
Fire Station/Ambulance	\Diamond	♦
High Security	♦	\Diamond
Mini-Warehouse	\Diamond	\Diamond
Service Stations	\Diamond	♦
Thermal Environments	\Diamond	\Diamond
Transit/Logistics Facility	\Diamond	♦
Warehouse/Manufacturing	♦	♦

SPECIFICATIONS

3/4" DOOR SECTION THICKNESS (44mm)

Rollformed from commercial quality galvanized steel and bonded to an expanded polystyrene insulating core.

PVC BOTTOM RETAINER W/ASTRAGAL

Retainer & weatherstrip seals out insects, absorbs closing shock and protects against the elements.

Prefinished STEEL

Exterior and interior door skins are protected with a five coat prefinished flush steel with a woodgrain texture.

STANDARD HARDWARE 14 Ga

Made for both commercial and industrial applications; our door hardware comes standard in 14 ga steel.

PRE-DRILLED Holes

Convenient, pre-drilled holes for on-door hardware.

BACKUP PLATES 16 Ga

Steel backup plates for hardware, hinge and strut reinforcement.

UNI-COM ST-101

WINDOWS & GLASS













UNI-COM FLUSH





DOOR SIZES

HEIGHTS: 6'6" to 20'0"

WIDTHS: 8, 9, 10, 12, 14, 16, 18, & 20,

(other dimensions available upon request)

ADDITIONAL OPTIONS

TORSION & DUPLEX SPRINGS

For dependable springs that are perfectly made for your doors; ask about 25k, 50k, or 100k cycle options with our industry proven springs. Square wire available in Canada.

HINGES AND OTHER HARDWARE

As a full-line manufacturer, we manufacture and sell our own brand of hinges and hardware to accompany your new garage doors.

HORIZONTAL & VERTICAL TRACK

Available configurations for your specific applications. Our track is produced for your specific incline and headroom applications with the ability to be pre-assembled for your conveneince.

COMMERCIAL OPERATORS

Complete line of commercial, industrial operators manufactured in the USA & Canada for jackshaft & trolley style applications.


$2^{3/4}$ " (single end hinge) or $5^{1/2}$ " (double end hinge) kiln dried, wood end stiles with an additional option of 24" double steel end caps available.

23/4 END STILES



Perfect for all commercial and industrial applications; the 'exhaust port' allows exhaust and other particulates to exit outside when door is closed



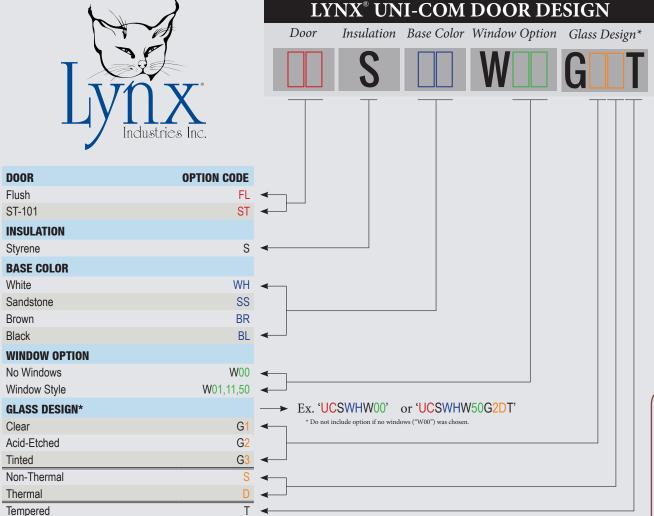



COMMERCIAL

For fast and convenient ordering, use the table to get the code for your desired model design & attributes.

LYNX-NSW.COM/GARAGEDOORS

NEW JERSEY

613 Industrial Rd. Carlstadt, NJ 07072

ONTARIO

6311 Vipond Dr. Mississauga, ON L5T 1T7

QUEBEC

175 Upper Edison Ave. St. Lambert, QC J4R 2R3

Your professional Lynx distributor:



Limited 15 Year Plus Warranty for Residential Doors: Model ST-101 & Flush series

Lynx Industries warrants the Uni-Com ST-101 & Flush insulated garage doors for fifteen (15) years against rust due to manufacturer's defects. This limited warranty excludes damage caused by exposure to weather, chemicals, improper installation, negligence or circumstances beyond the control of Lynx Industries.

Lynx Industries warrants the Uni-Com ST-101 & Flush insulated garage doors for fifteen (15) years against structural failure due to delaminating of foam insulation or rotting of wood blocks. This warranty is limited and is non-transferable.



Like, Follow, and Share!













